



HISTORICAL RIDE QUALITY OUTCOMES UNDER SCDOT'S RIDEABILITY SPECIFICATION

DAHAE KIM, PH.D., P.E, *SOUTH CAROLINA DEPARTMENT OF TRANSPORTATION*
ASSISTANT STATE PAVEMENT DESIGN ENGINEER

JAIME PRECIADO, PH.D., *APPLIED RESEARCH ASSOCIATES, INC.*
PAVEMENT ENGINEER

OUTLINE




- **Background**
- **Study Objectives**
- **State of Practice**
- **Analysis of Historical Rideability Data**
- **Conclusions**

BACKGROUND



Pavement Roughness

- A key functional performance indicator affecting comfort, fuel efficiency, safety, and maintenance costs.
- Lower initial IRI (post-construction) is generally associated with improved long-term pavement performance and reduced maintenance needs.
- Many transportation agencies have adopted rideability specifications for new pavement construction.

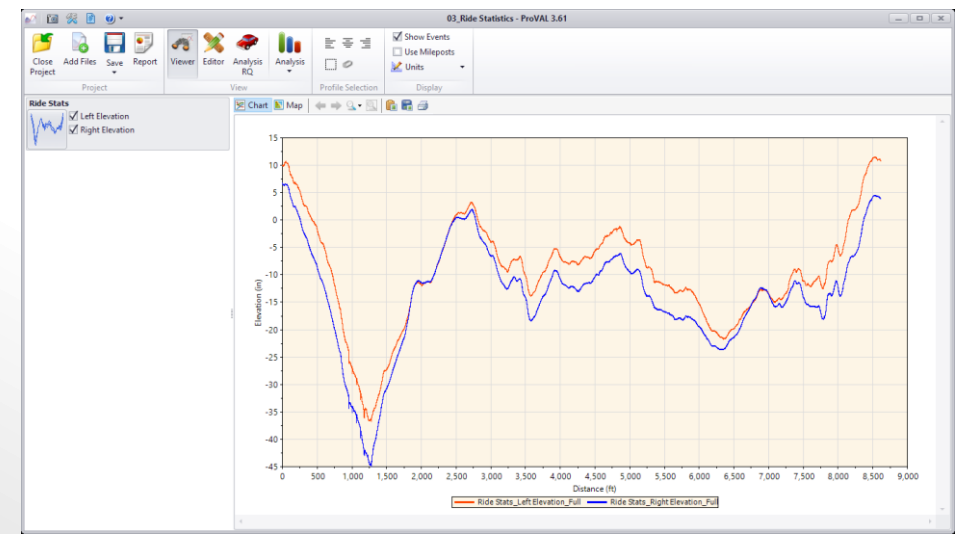

BACKGROUND



SC Rideability Specification

- SCDOT implemented a rideability specification based on the International Roughness Index (IRI).
- The specification establishes incentive and disincentives to improve ride quality, tailored to different project types.

History

- September 2008 : Applied to new construction and resurfacing projects
- September 2011: New Tables introduced following rideability research
- April 2016: Transition from point laser to line laser technology
- July 2021: Addition of CMRB single lift provision

Supplemental Technical Specification for

Rideability for Asphalt Mixtures


SCDOT Designation: SC-M-403 (4/16)

1. SCOPE

- 1.1. The Resident Construction Engineer (RCE) will evaluate asphalt surfaces for a satisfactory ride. If conditions permit and unless otherwise specified in the special provisions, the Materials and Research Engineer will test the asphalt surface in accordance with **SC-T-125** when requested by the RCE. General guidelines for the application of this specification are shown in Figure 1.

2. REFERENCED DOCUMENTS

- 2.1. **SC-T-125**, *Measurement of Pavement Rideability using the Dynatest 5051 Mark III Road Surface Profiler with LMI 3D Gocator series wheel path lasers.*
- 2.2. **SC-M-502**

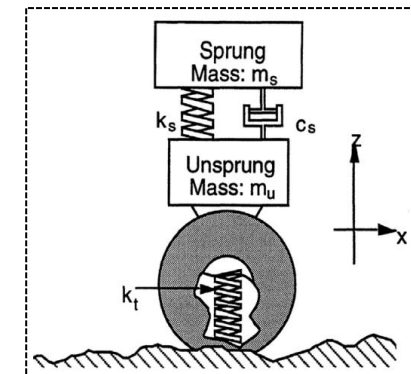

BACKGROUND



South Carolina's Rideability Specification SC-M-403

Table 1 – New Construction and ML Overlay on Interstate and Limited Access

Table 4 - OGFC

Table 3 – ML Overlay on Non-Limited Access Segments

Table 3 – Reclamation

Functional class distinction

Table 6 – Single Lift Overlay (Resurfacing)

Reclamation Single Lift

Same functional class but different amount of material available to improve profile

Overlay \leq 150 psy

BACKGROUND



Motivation for Revising SC-M-403

- A comprehensive statewide analysis of historical project-level rideability performance has not been recently conducted, limiting data-driven updates to the specification.
- Current framework may not optimize cost–benefit or long-term pavement performance incentives.
- Field experience shows recurring CMRB chatter issues, potential gaps in smoothness/ride quality evaluation.
- Current ride specification does not capture localized roughness; a localized roughness-based spec could better address this gap.
- Specification complexity leads to interpretation and implementation challenges.

STUDY OBJECTIVES




- Literature Review - Rideability specifications, methodologies, and practices from other states.
- Historical Rideability Data Analysis - SCDOT's historical rideability data to assess the effectiveness of the current incentive and disincentive framework.
- Performance Based Ride Specification - Conduct performance-based assessment of rideability provisions by linking initial pavement smoothness to long-term performance and economic outcomes.
- Localized Roughness Specification Analysis
- Proposal of New Thresholds - Develop recommendations for refinement to SCDOT's existing rideability specification.

STATE OF PRACTICE



Survey Questions (July 2024)



- Structure of ride quality specifications
- Performance requirements and acceptance criteria
- Incentive and disincentive provisions
- Area of localized roughness (ALR) requirements
- Measurement technologies
- Operational and implementation procedures

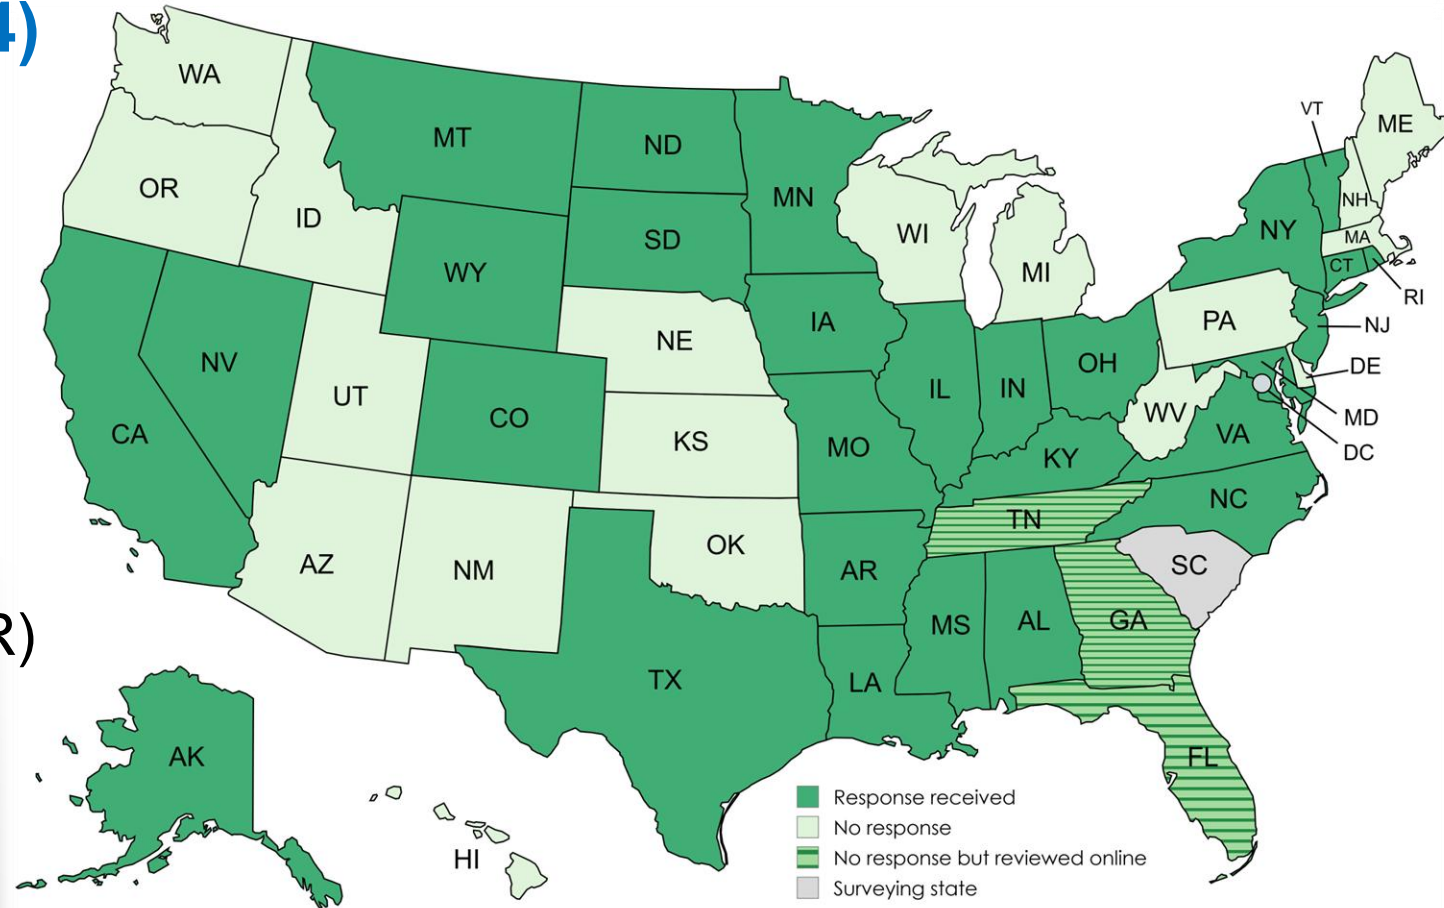

STATE OF PRACTICE



IRI Requirements

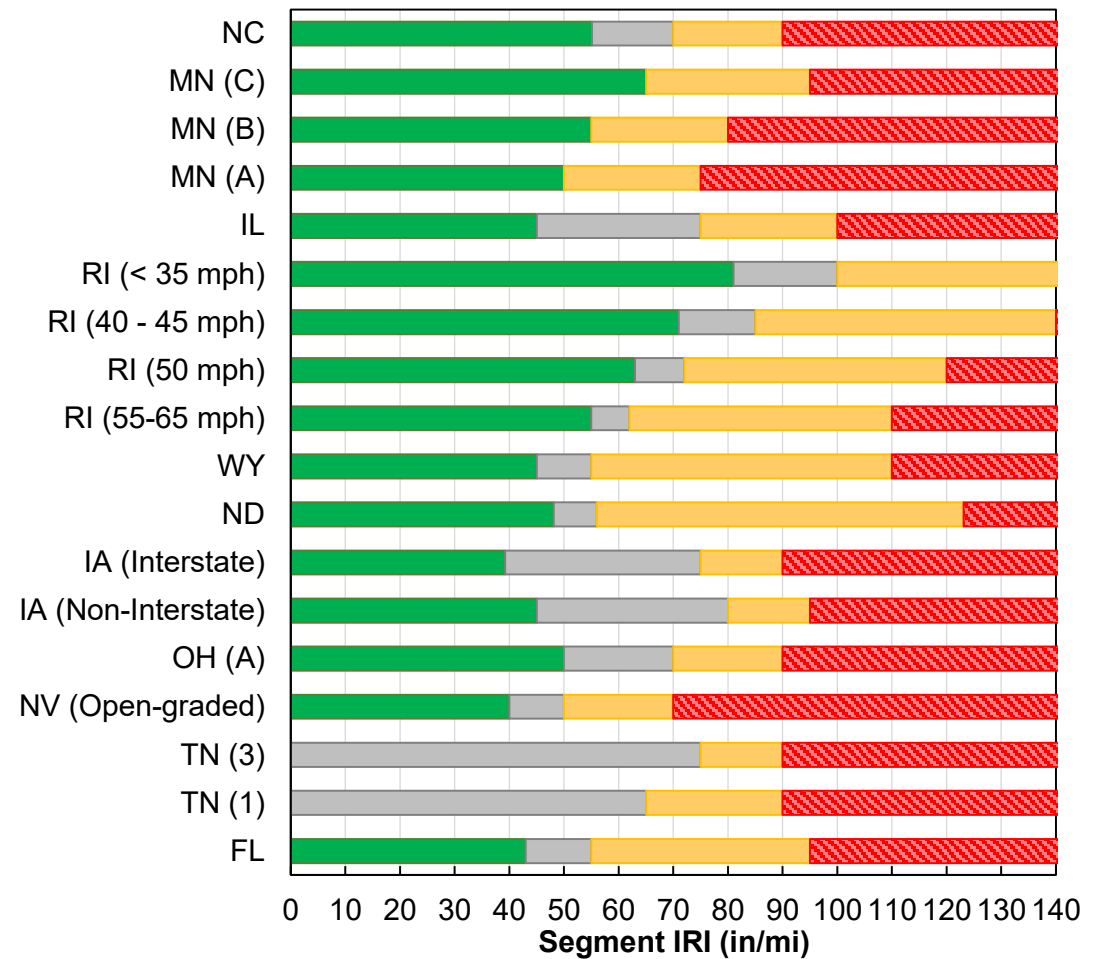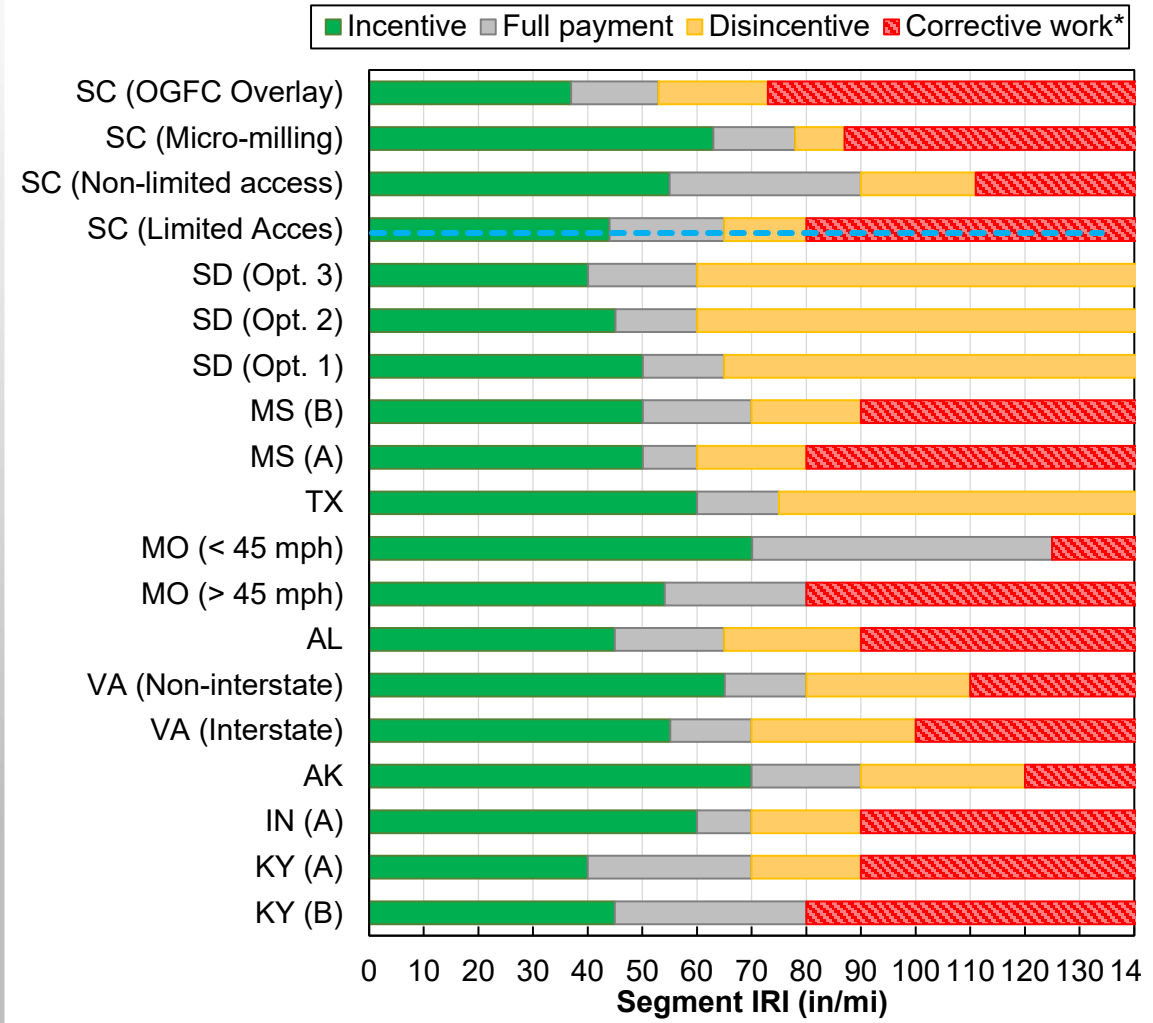


STATE OF PRACTICE




Pay Incentive and Disincentives

Portion of Unit Bid Value

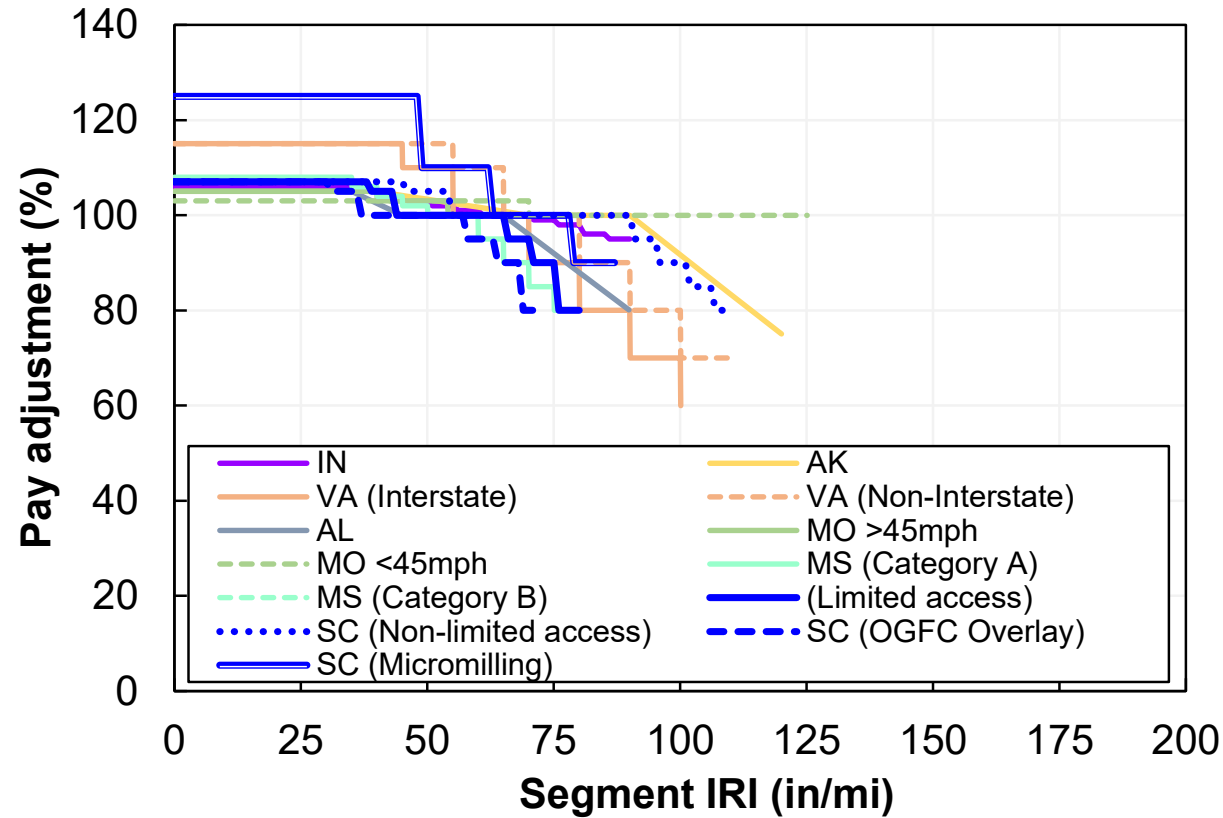


Fixed Dollar Amount

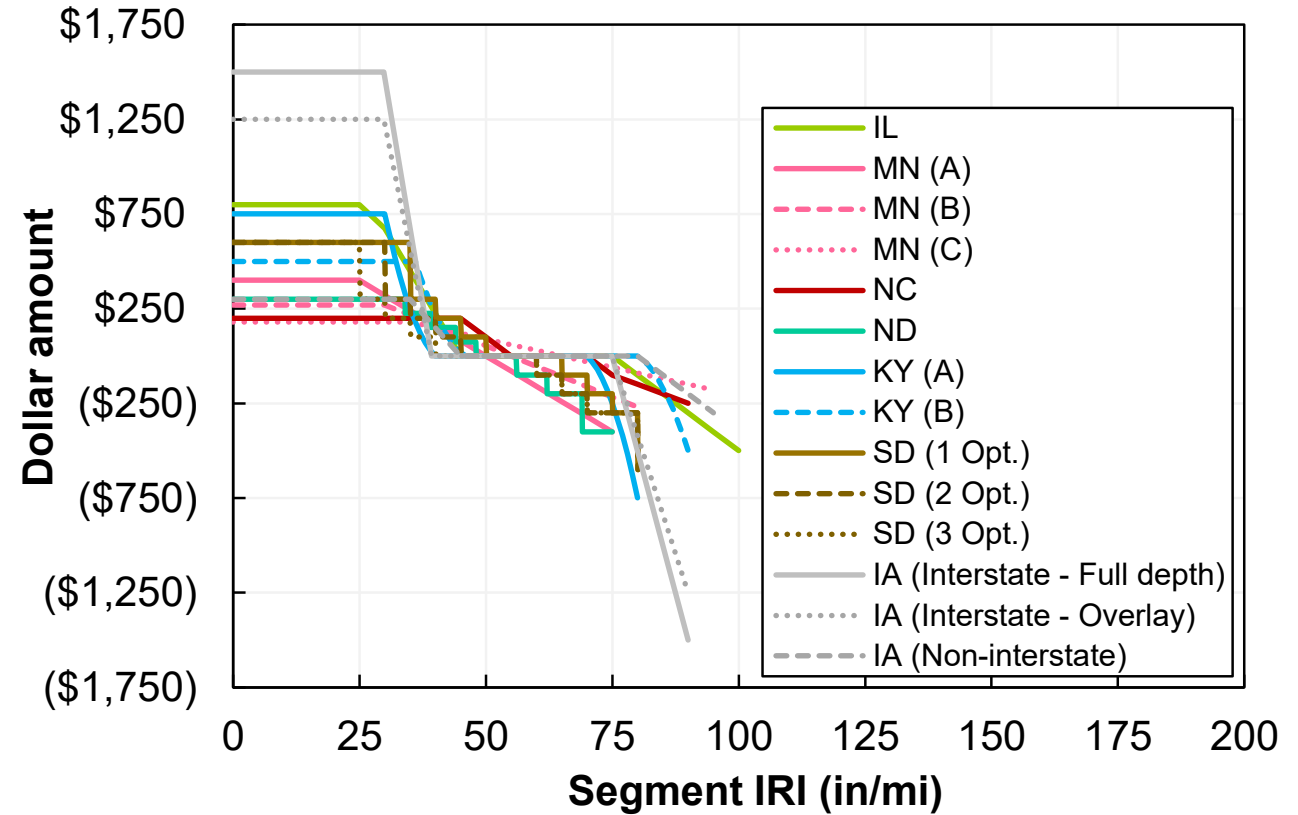

STATE OF PRACTICE



Implementation of Area of Localized Roughness (ALR) Provisions

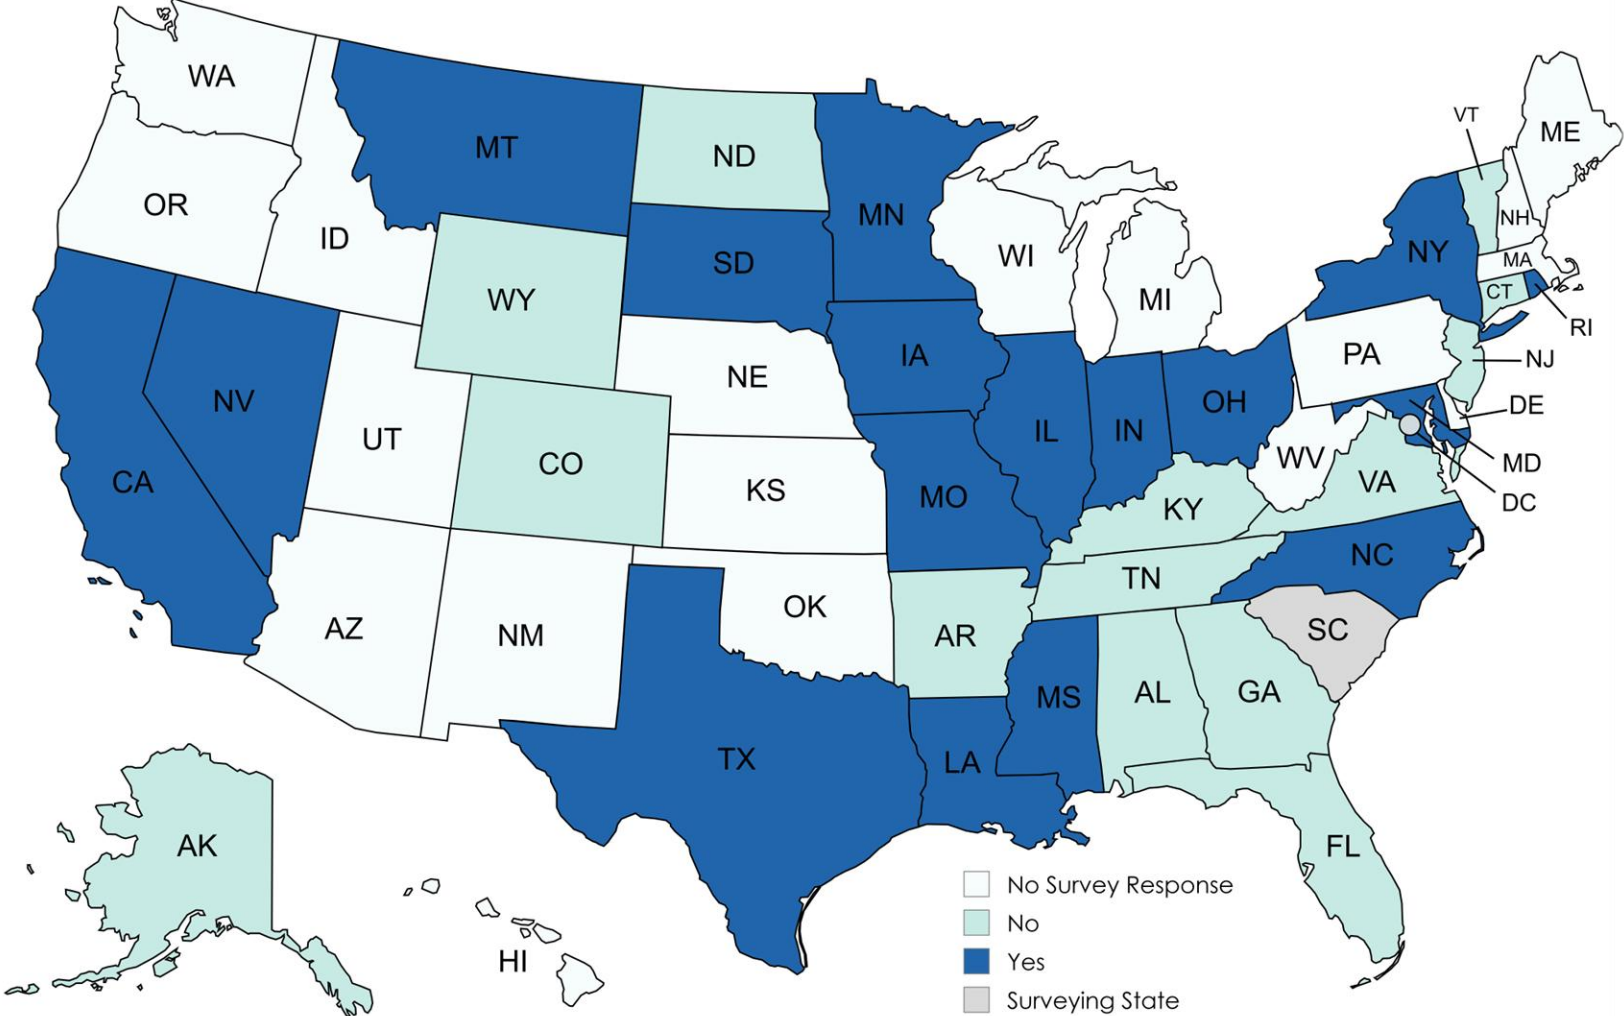




HISTORICAL RIDEABILITY DATA

HISTORICAL RIDEABILITY DATA



Temporal IRI Analysis




- Analysis of IRI trends over the past 10 years

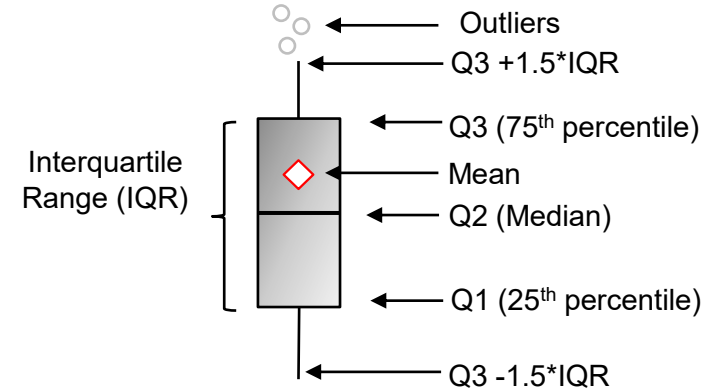

New Construction/ML on Interstate & Limited Access

ML on Non-Limited Access

Reclamation ML

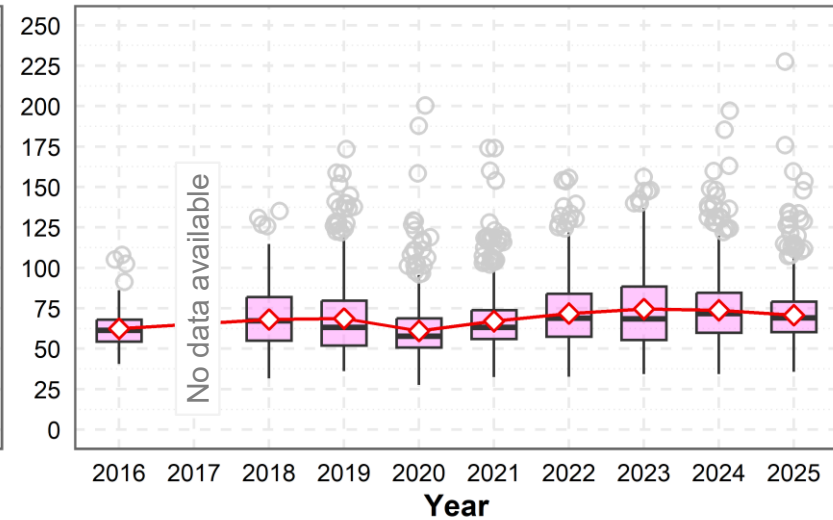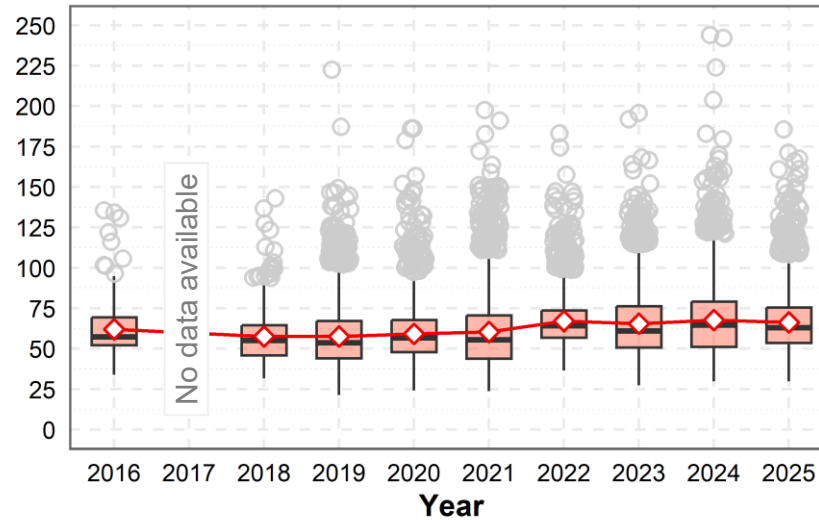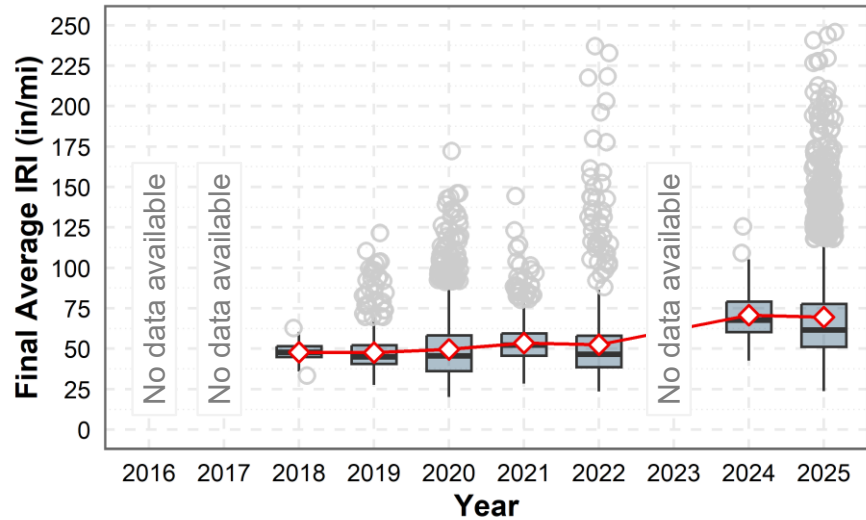


*ML = Multiple lifts

HISTORICAL RIDEABILITY DATA




Temporal IRI Analysis


- Analysis of IRI trends over the past 10 years

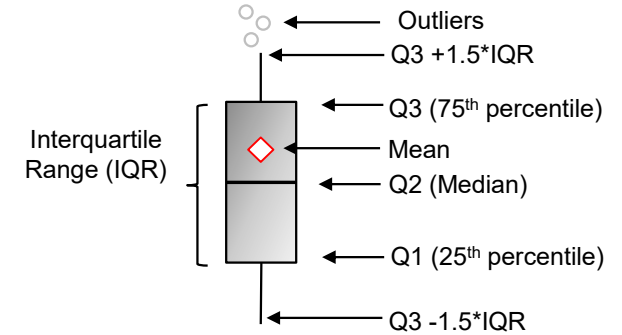

Reclamation SL

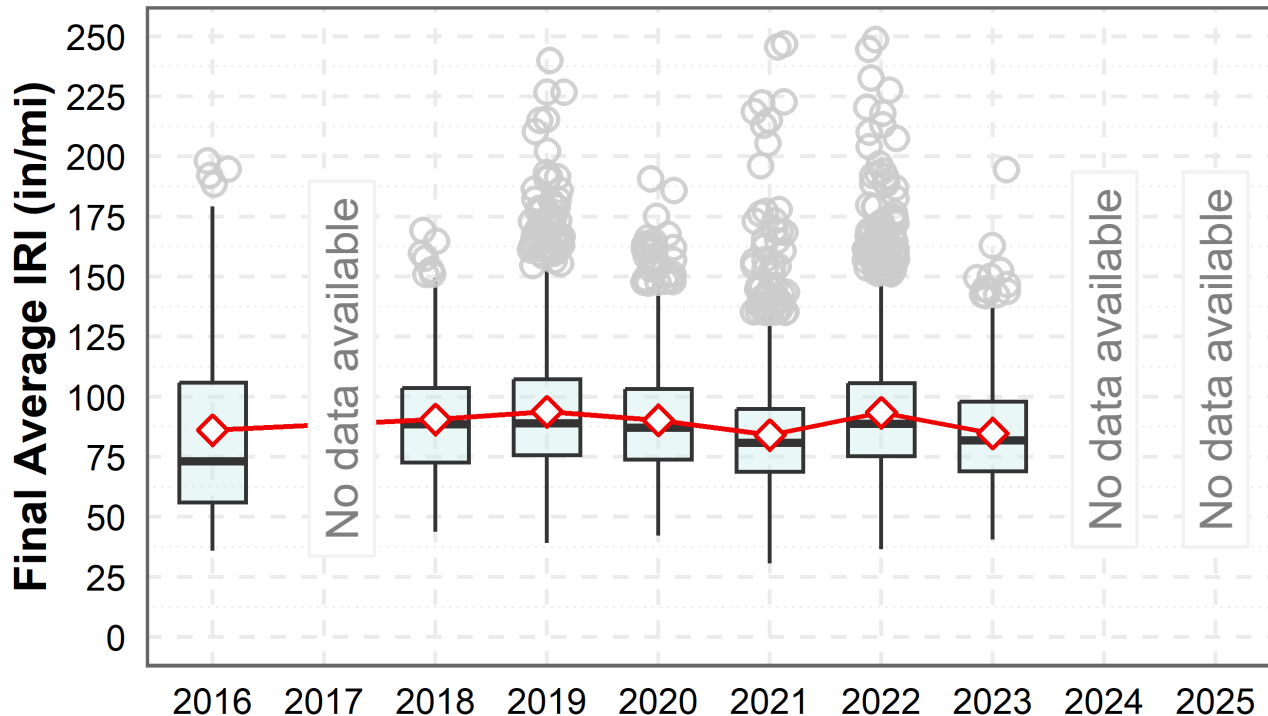

OGFC

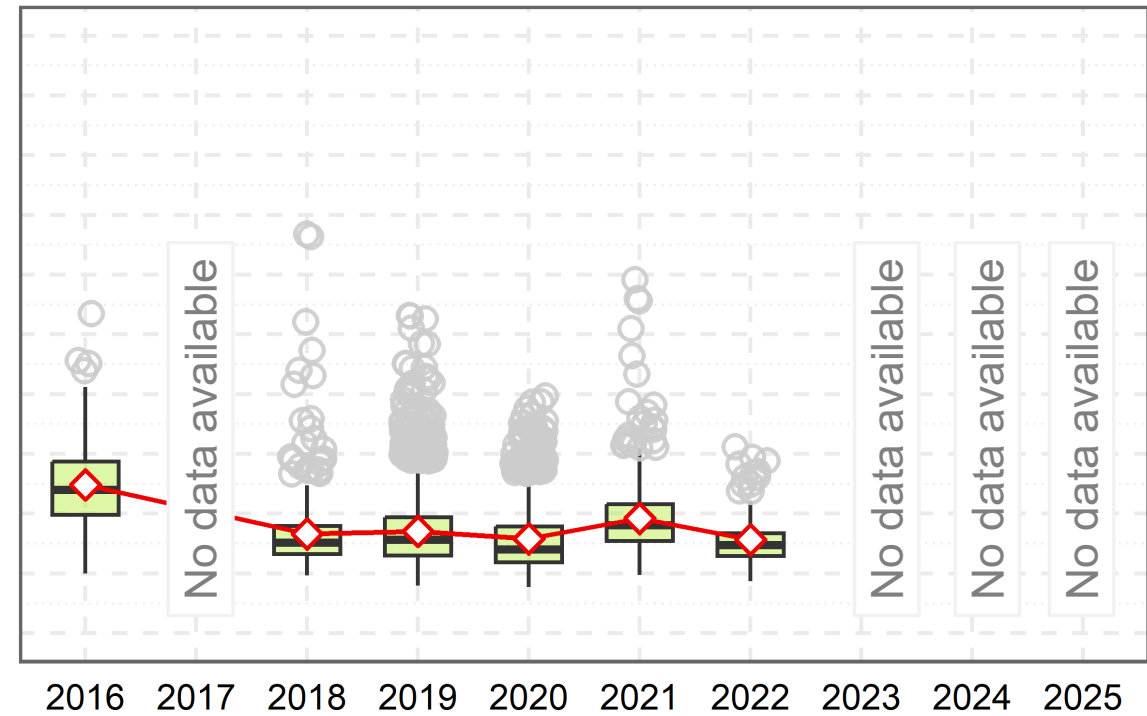


*SL = Single lift

HISTORICAL RIDEABILITY DATA




Temporal IRI Analysis


- Analysis of IRI trends over the past 10 years

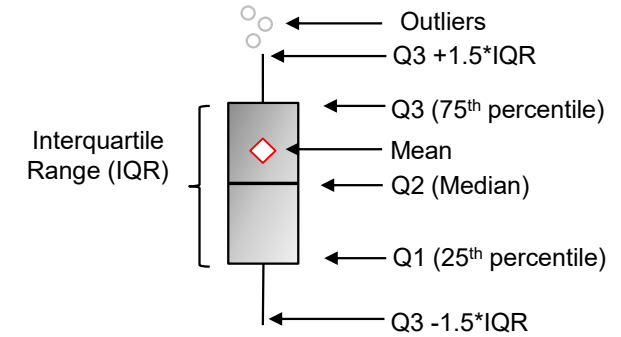

Overlay <= 150 psy

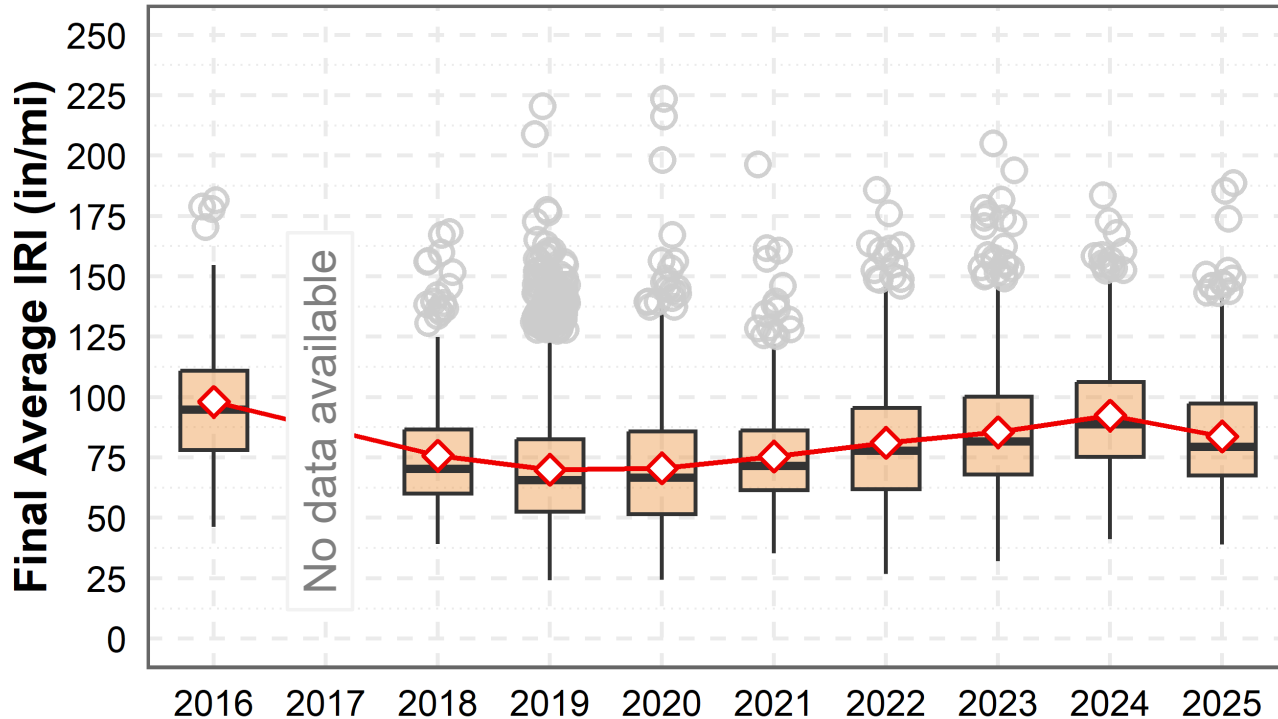

Resurfacing

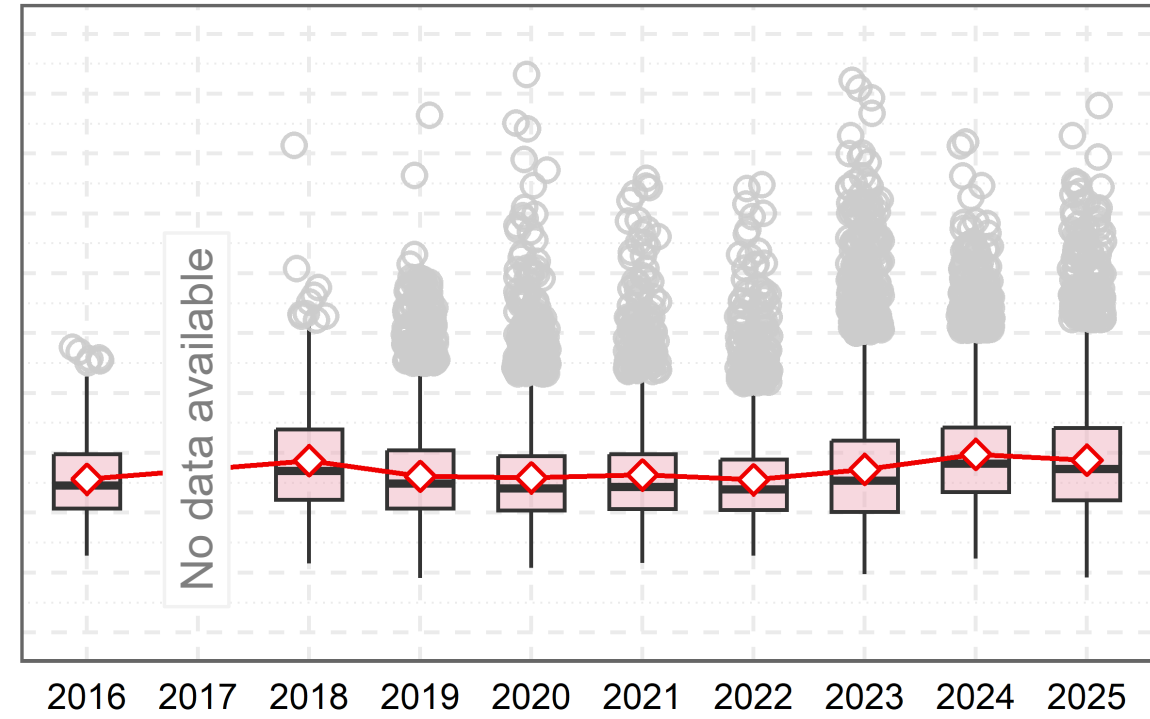

HISTORICAL RIDEABILITY DATA



Temporal IRI Analysis

- Analysis of IRI trends over the past 10 years

Project/Specification	Average Final IRI (in/mi)										
	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	Avg.
New construction/ML	NA	NA	47.9	47.8	49.6	53.6	52.5	NA	70.8	69.6	56.0
ML non-limited access	61.9	NA	57.7	57.6	59.2	60.3	67.08	65.5	67.8	66.4	62.6
Reclamation ML	62.4	NA	68.1	68.6	61.1	67.1	71.9	74.5	73.8	70.8	68.7
Reclamation SL	86.1	NA	90.6	93.8	90.3	84.1	93.4	84.8	NA	NA	89.0
OGFC Overlays	62.1	NA	41.5	42.6	39.4	48	39	NA	NA	NA	45.4
Overlay <= 150 psy	98.1	NA	75.8	69.9	70.6	75.5	81.2	85.5	92.4	83.8	81.4
Resurfacing	64.1	NA	71.8	65.3	64.6	65.9	63.8	68.2	74.4	72	67.8


HISTORICAL RIDEABILITY DATA




Statistical Distributions

- Distributions of IRI values for each project type and assessment of current thresholds

Specification: Table 1

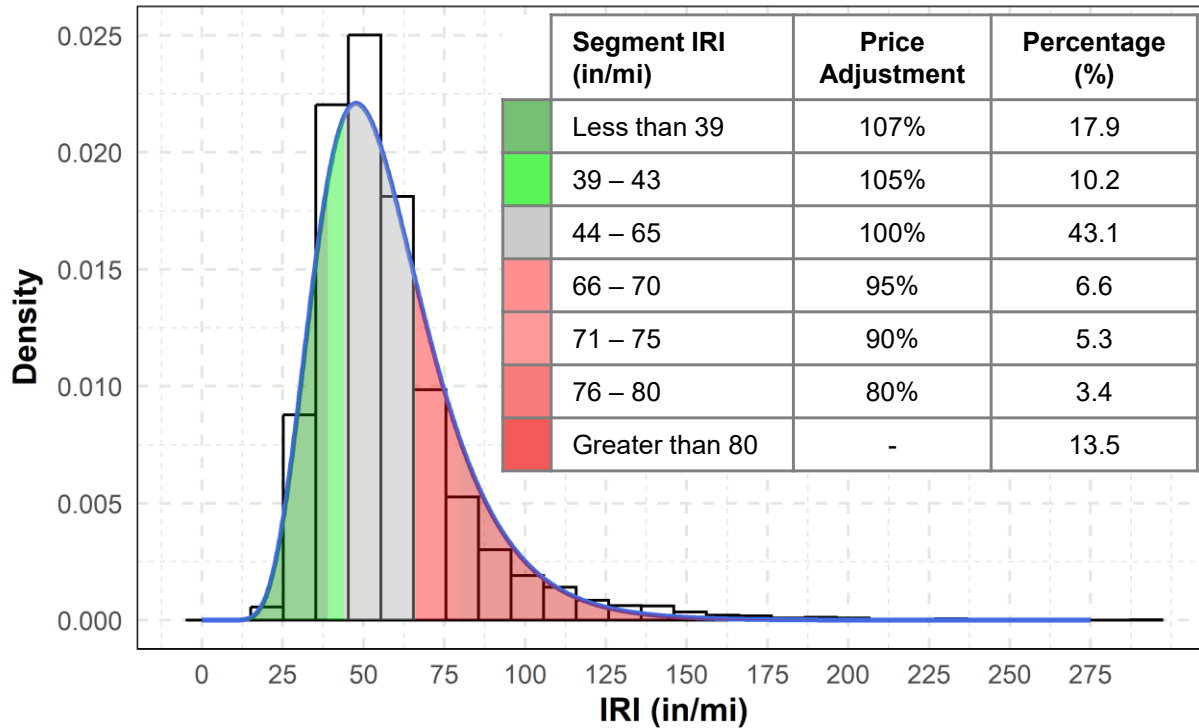

Specification: Table 3

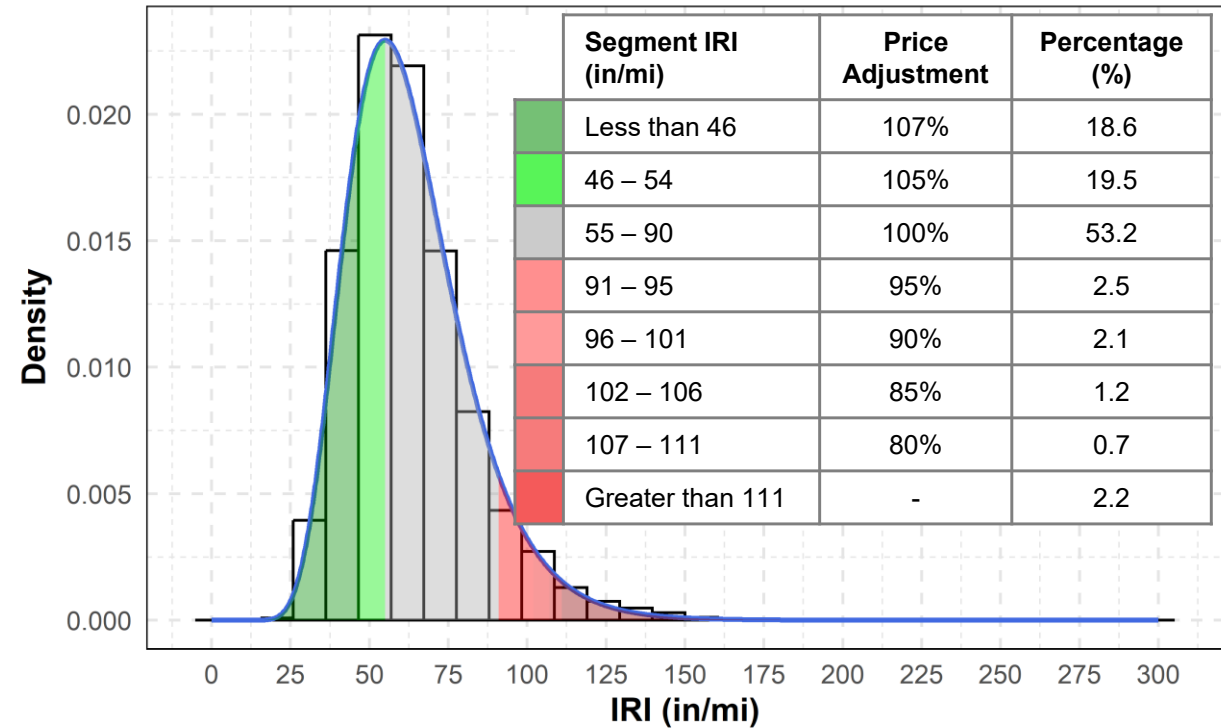


HISTORICAL RIDEABILITY DATA




Statistical Distributions

- Distributions of IRI values for each project type and assessment of current thresholds

Specification: Reclamation ML (Table 3)

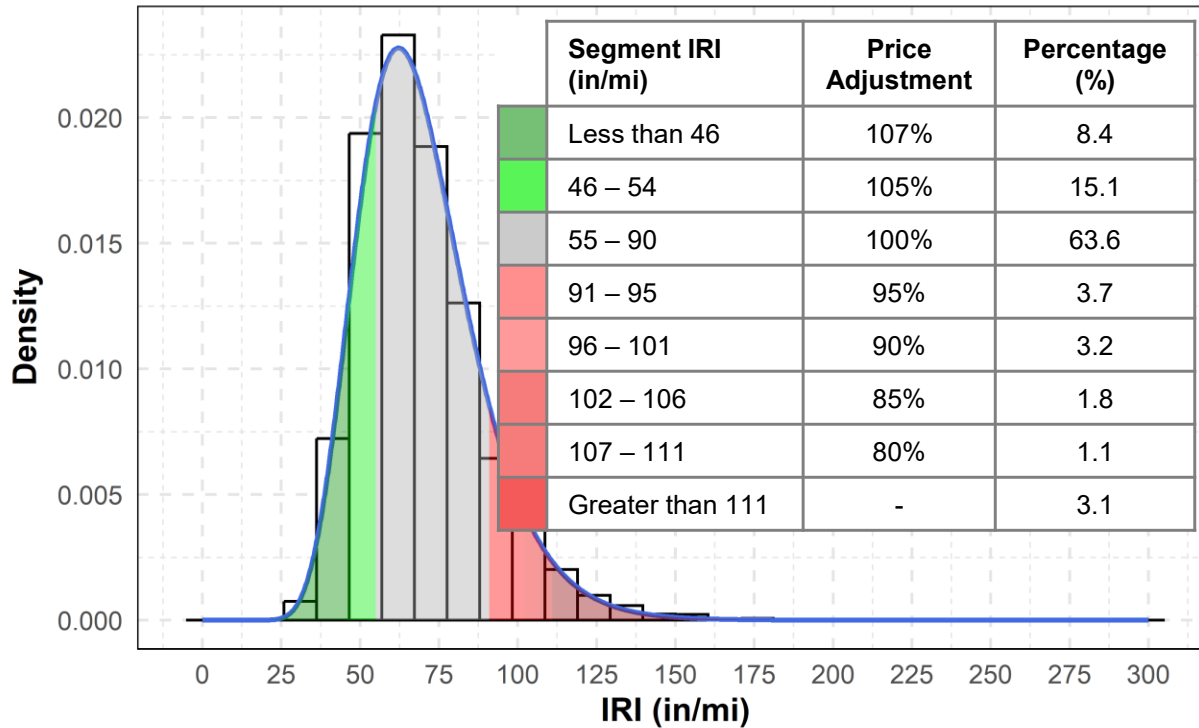

Specification: Reclamation SL


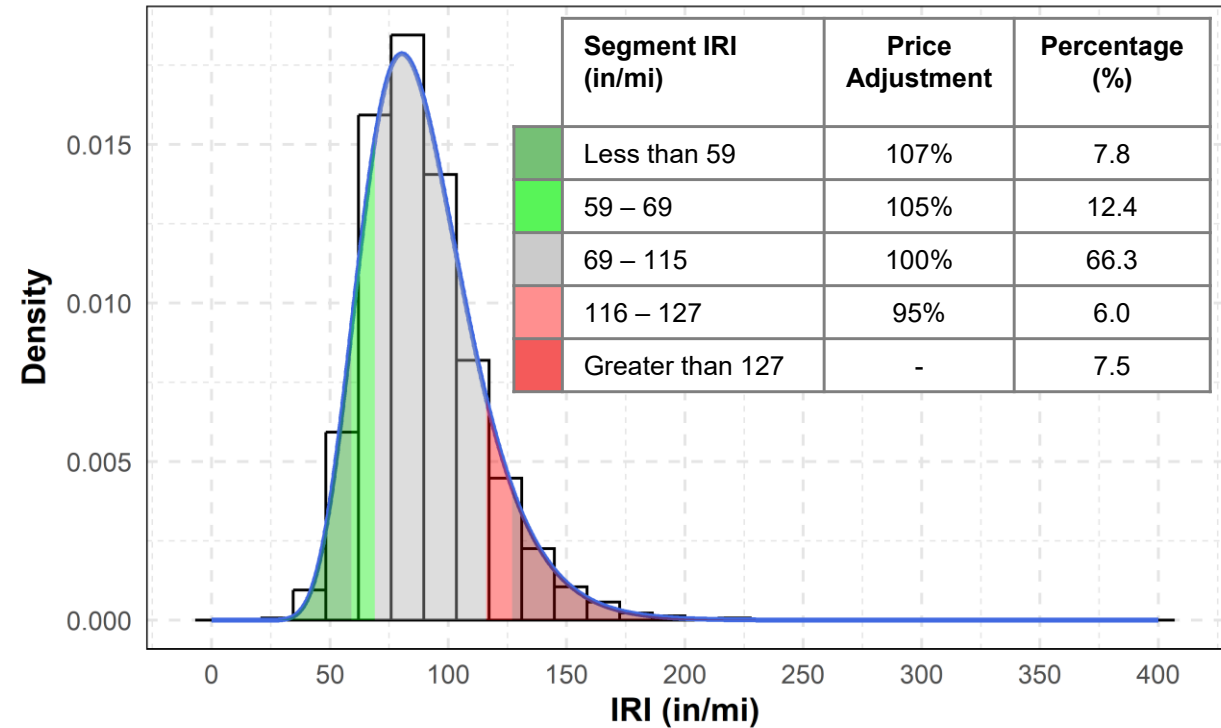


HISTORICAL RIDEABILITY DATA



Statistical Distributions

- Distributions of IRI values for each project type and assessment of current thresholds

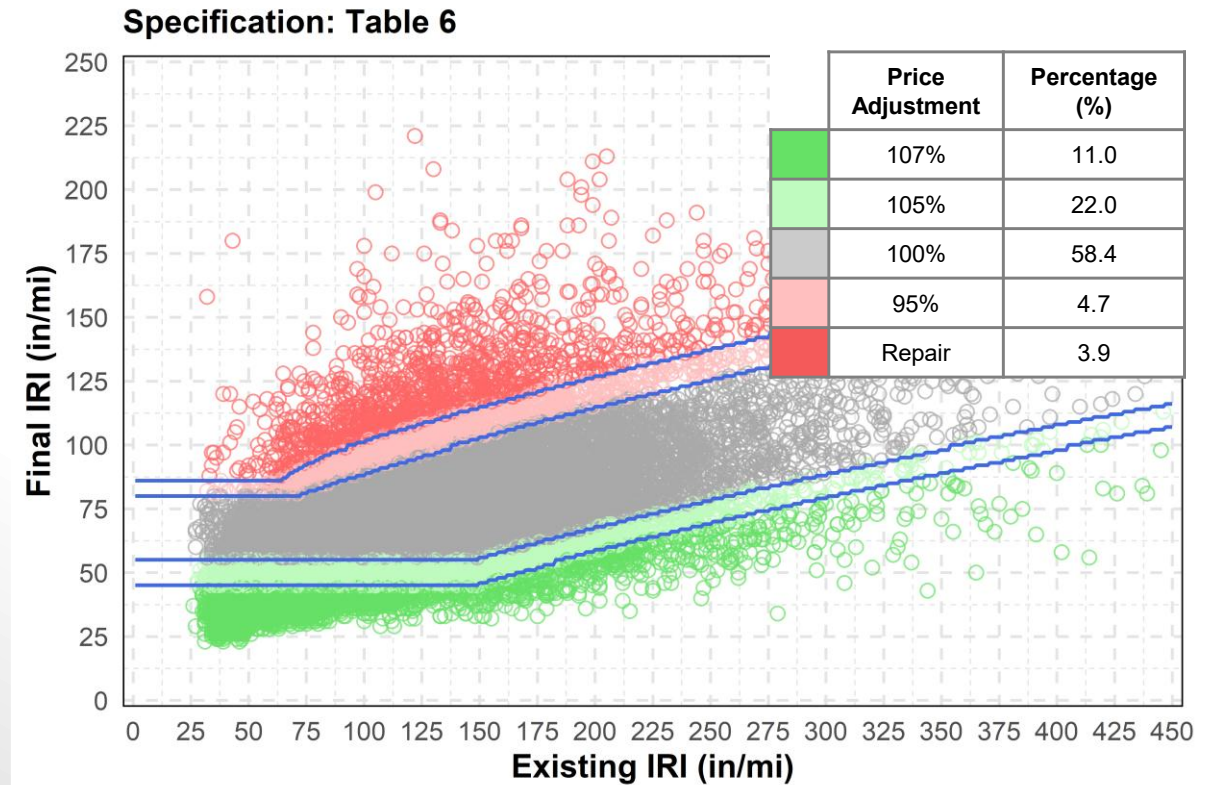
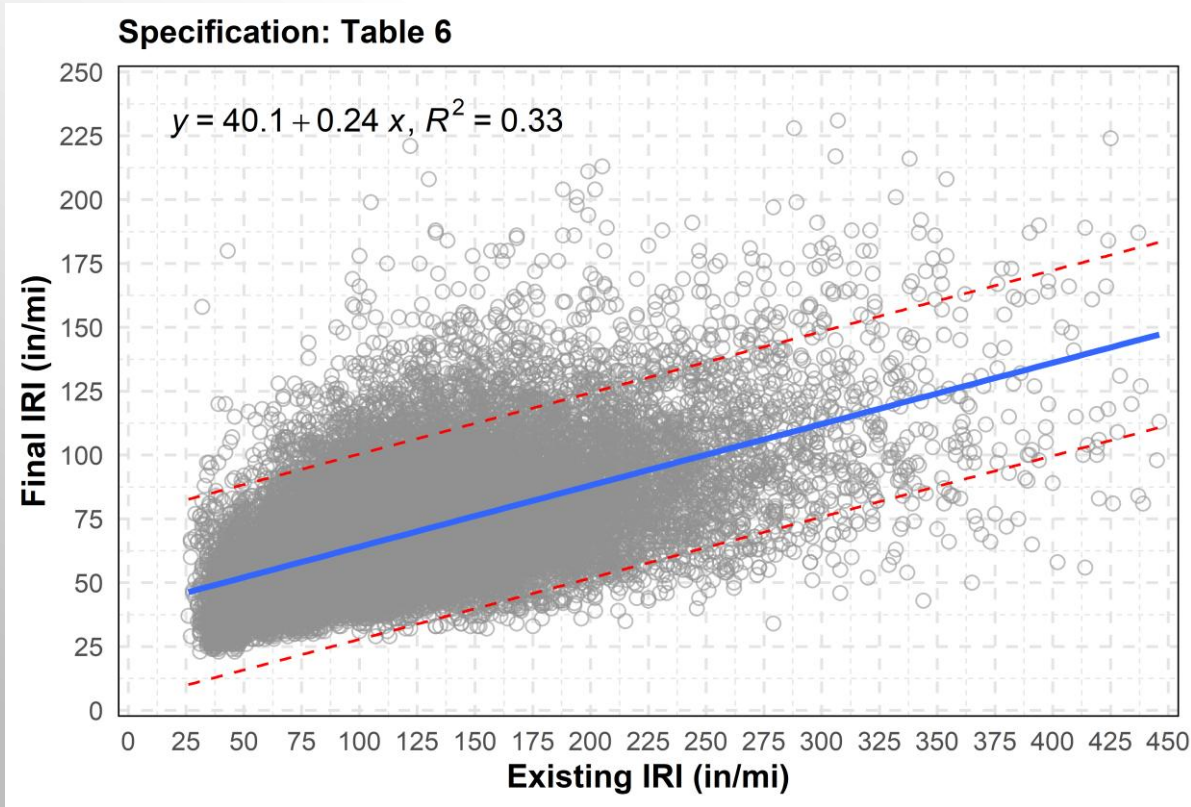


HISTORICAL RIDEABILITY DATA



Statistical Distributions

- Distributions of IRI values for each project type and assessment of current thresholds

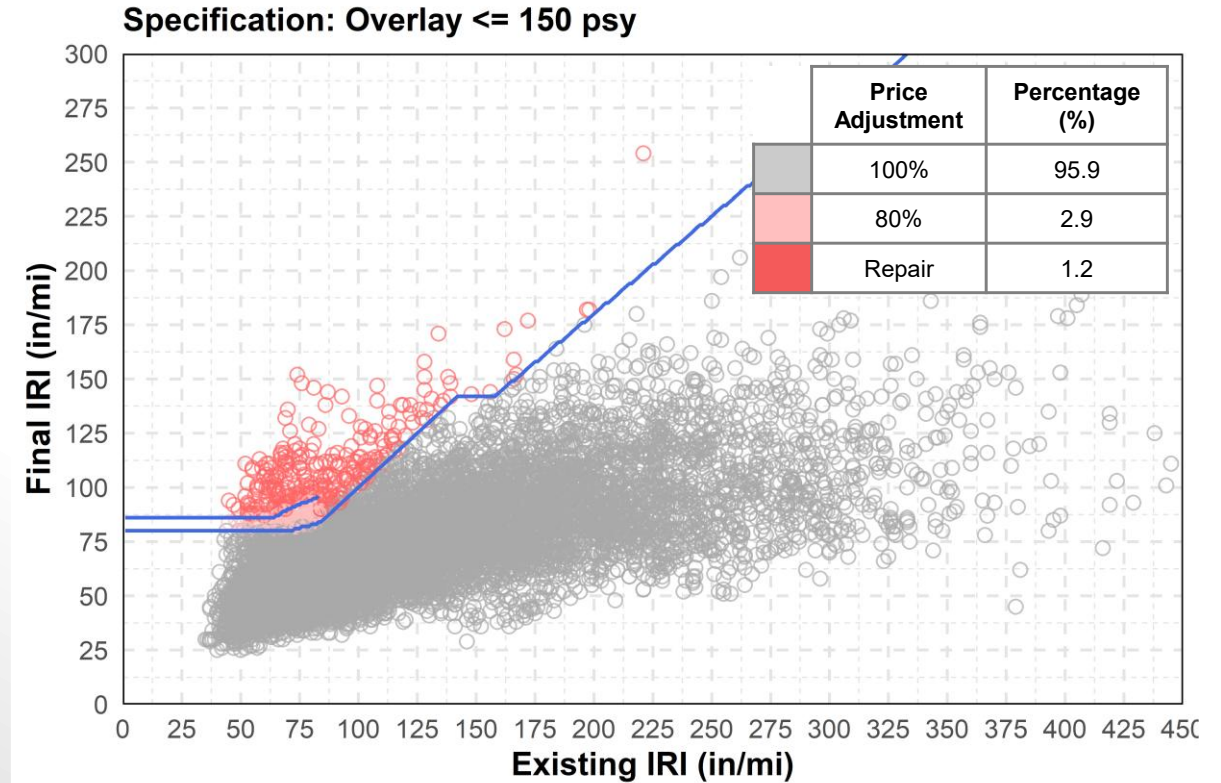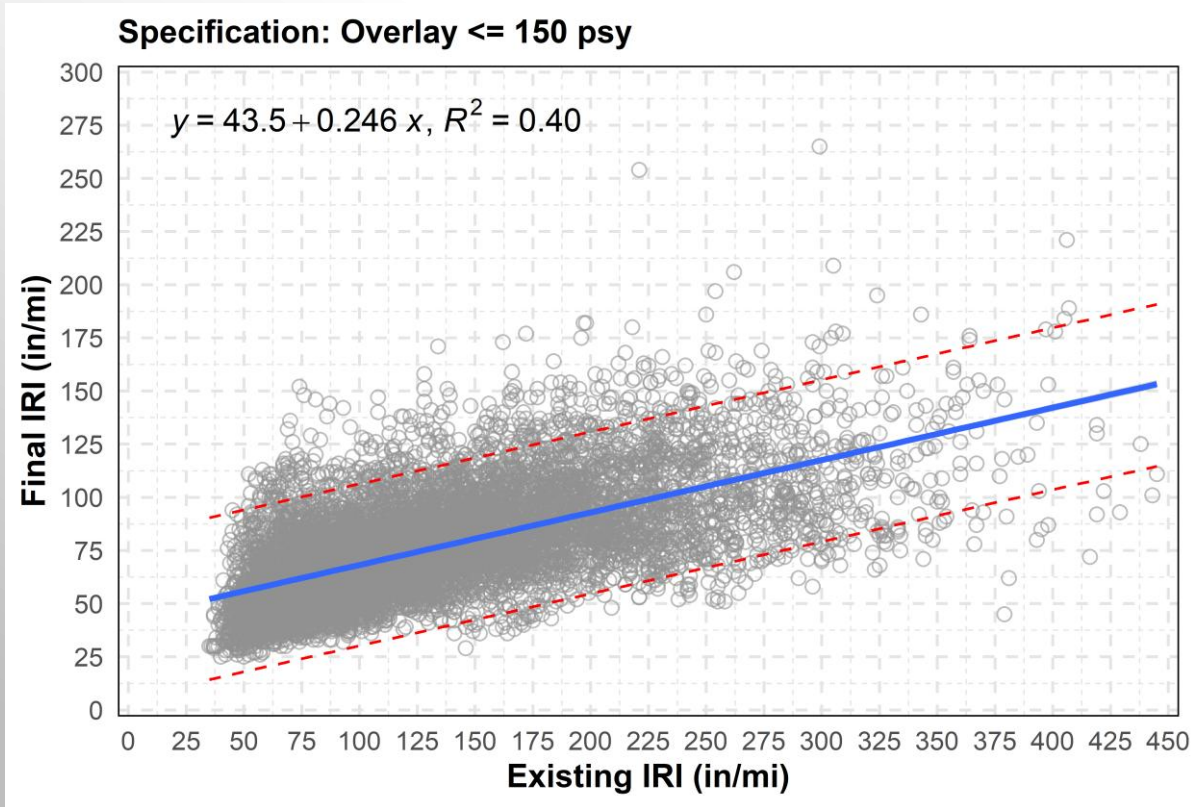

CONCLUSIONS




Conclusions

- Slight increase in IRI for some project types, while no consistent trend was observed for others
- Major segments achieve full pay or qualify incentives
- Small percentage of segments fall into disincentive or corrective-action categories

Beyond Today's Presentation

- Performance-based assessment linking initial smoothness to long-term pavement performance and economic outcomes through roughness deterioration modeling.
- Propose updated rideability specification with new thresholds for each table.

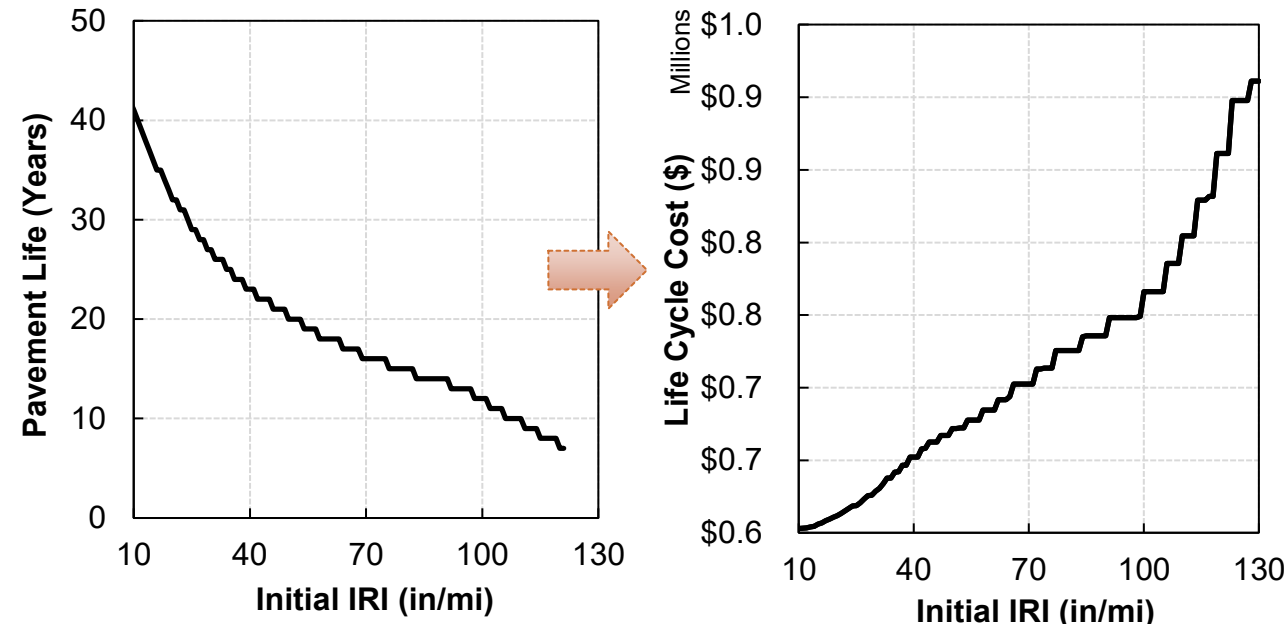



THANK YOU

KIMD@SCDOT.GOV



JPRECIADOCASTILLO@ARA.COM

